

(12) UK Patent Application (19) GB (11) 2 318 803 (13) A

(43) Date of A Publication 03.05.1998

(21) Application No 9802307.0

(22) Date of Filing 03.11.1995

Date Lodged 03.02.1998

(30) Priority Data

(31) 03343015 (32) 21.11.1994 (33) US

(62) Divided from Application No 9322528.0 under Section 15(4) of the Patents Act 1977

(71) Applicant(s)

Baker Hughes Incorporated

(Incorporated in USA - Delaware)

3910 Essex Lane, Suite 1200, Houston, Texas 77027,
United States of America

(72) Inventor(s)

James L Overstreet

Ronald L Jones

Alan J Massey

(51) INT CL⁶

C22C 29/02, C23C 4/10

(52) UK CL (Edition P)

C7A AA23Y AA25Y AA28Y AA30Y AA33Y AA34Y
AA37Y AA39Y AA41Y AA53Y AA58Y AA61Y A72Y
C7F FGA FP820 FR811 FR820 FR864 FR905 FR916
U1S S1647 S1761 S3035

(56) Documents Cited

None

(58) Field of Search

UK CL (Edition P) C7A A72Y, C7D DB400
INT CL⁶ C22C 29/00 29/02 29/05 29/03 29/10

(72) cont

Kevin W Schader

Danny E Scott

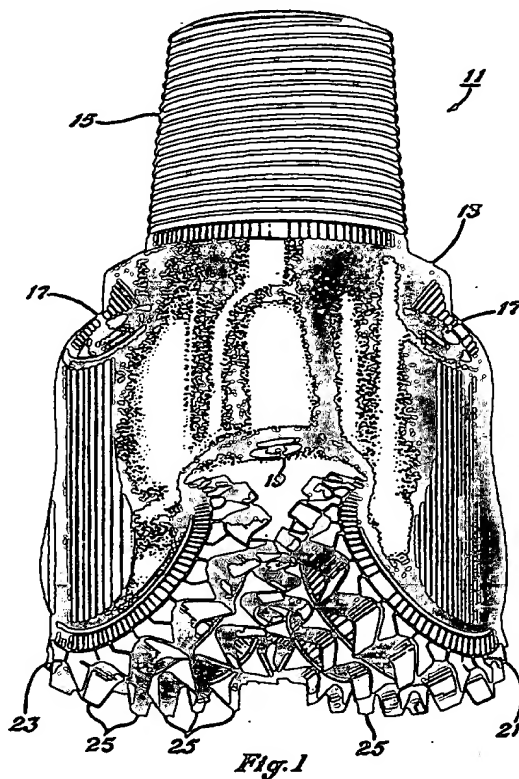
(74) Agent and/or Address for Service

Edward Evans & Co

Chancery House, 53-64 Chancery Lane, LONDON,
WC2A 1SD, United Kingdom

(54) Improved hardfacing composition for earth-boring bits.

(57) An earth-boring bit hardfacing composition comprises in pre-application ratios 41-49% by weight spherical sintered carbide pellets; 8-12.8% by weight spherical cast carbide pellets; 8-12.8% by weight crushed sintered carbide particles; and a balance of the composition matrix metal.



GB 2 318 803 A

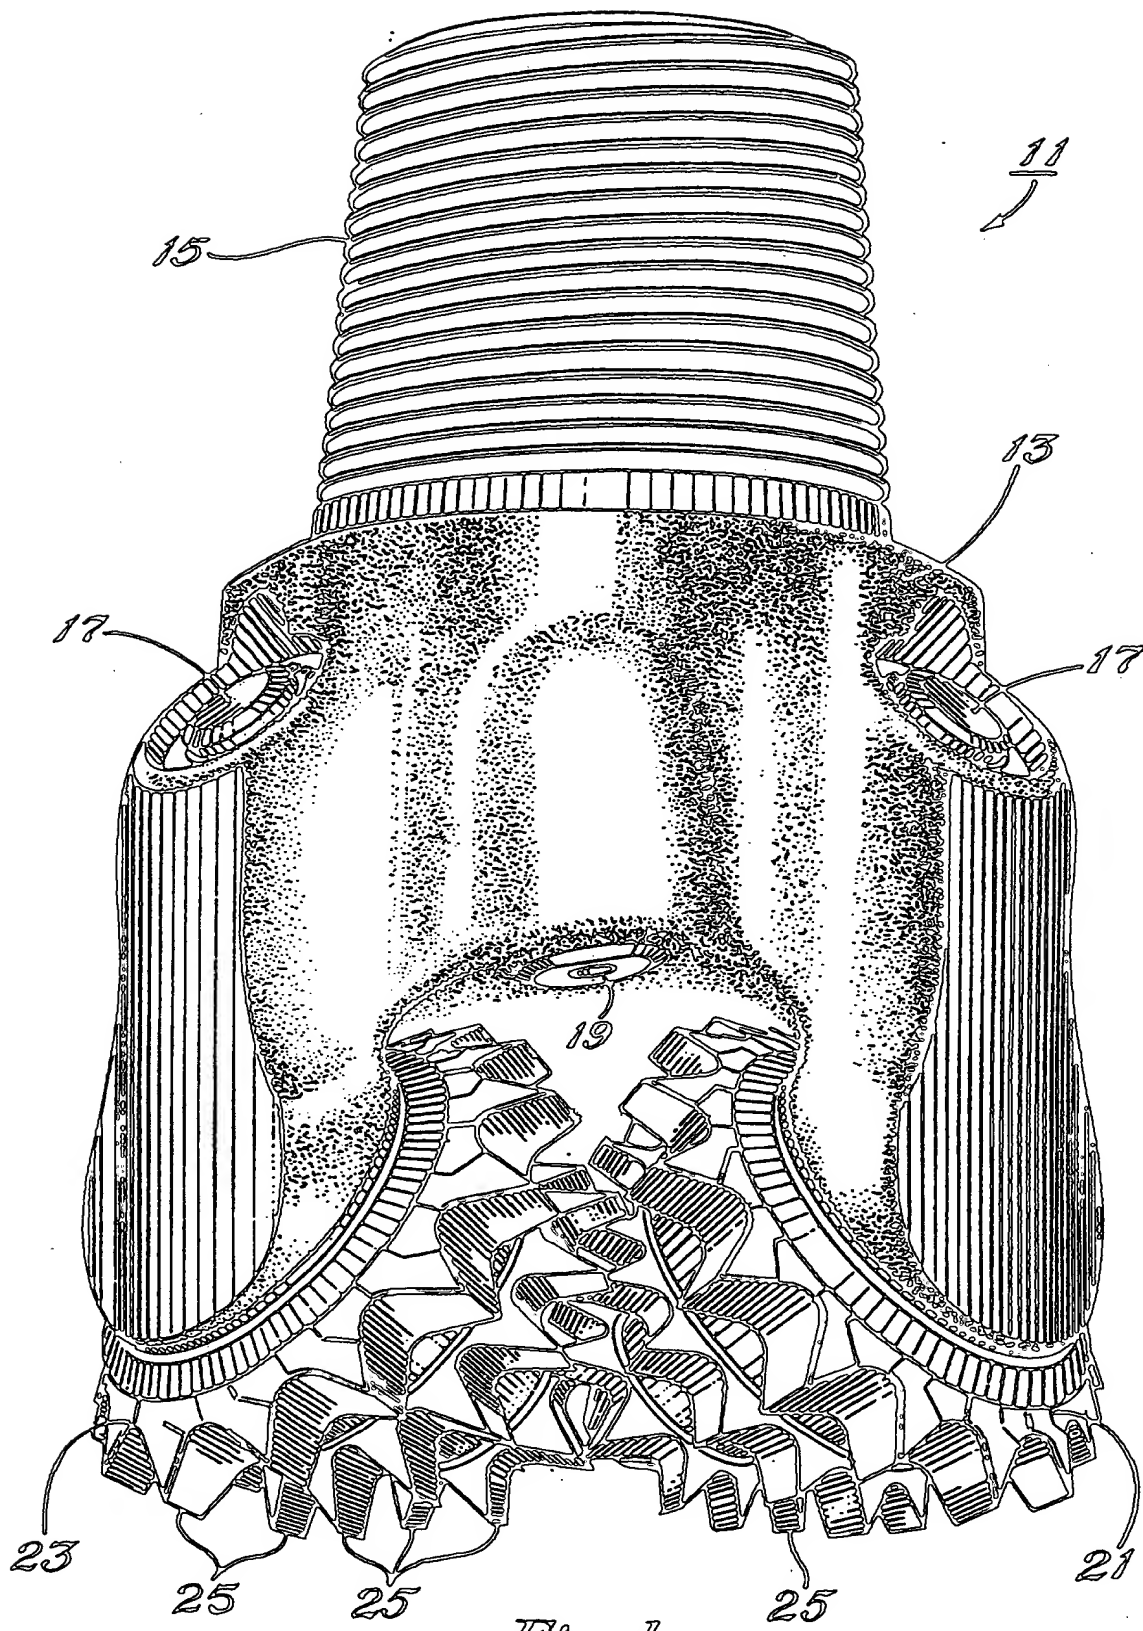
*Fig. 1*



Fig. 2

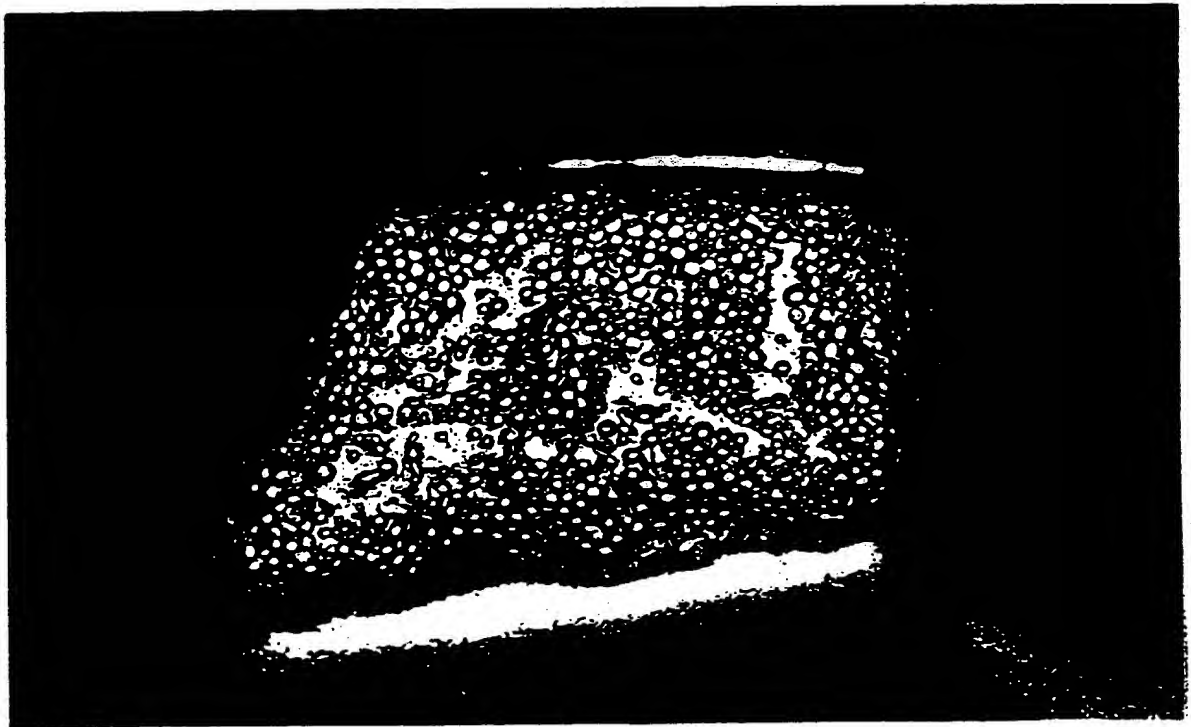


Fig. 3



Fig.4

IMPROVED HARDFACING COMPOSITION FOR EARTH-BORING BITS

The present invention relates to the composition of hardfacing materials applied to surfaces subjected to
5 abrasive wear to increase their wear resistance. More particularly, the present invention relates to hardfacing compositions applied to one or more surfaces of an earth-boring bit of the rolling cutter variety.

It is a long-standing practice in the design and manufacture
10 of earth-boring bits to apply wear-resistant hardfacing materials to the surfaces of such bits that are subjected to abrasive wear during drilling operations. In earth-boring bits of the rolling cutter variety, these surfaces include the teeth of bits of the milled or steel tooth variety, the
15 gage surfaces of the rolling cutters, and the shirrtails of the bit legs comprising the bit body.

In the past, these hardfacing generally comprise carbides of the elements of Groups IVB, VB, and VIB in a matrix metal of iron, cobalt, or nickel and alloys and mixtures thereof. The
20 hardfacing is applied by melting the matrix and a portion of the surface to which the hardfacing is applied with an oxyacetylene or atomic hydrogen torch. The carbide particles give the hardfacing material hardness and wear resistance, while the matrix metal lends the hardfacing fracture
25 toughness. A hardfacing composition must strike an adequate balance between wear resistance (hardness) and fracture toughness. A hardfacing composition that is extremely hard and wear-resistant may lack fracture toughness, causing the hardfacing to crack and flake prematurely. Conversely, a
30 hardfacing with adequate fracture toughness, but inadequate hardness and wear resistance, is eroded prematurely and fails to serve its purpose.

Many factors affect the suitability of a hardfacing composition for a particular application. These factors
35 include the chemical composition and physical structure of

the carbides employed in the composition, the chemical composition and microstructure of the matrix metal or alloy, and the relative proportions of the carbide materials to one another and to the matrix metal or alloy. One early advance
5 in hardfacing compositions for use in earth-boring bits is disclosed in US-A-3800891. This patent discloses a hardfacing composition comprising sintered tungsten carbide in an alloy steel matrix. Sintered tungsten carbide comprises grains or particles of tungsten carbide sintered
10 with and held together by a binder of non-carbide material, such as cobalt. The sintered tungsten carbide possesses greater fracture toughness than the more conventional cast tungsten carbide, such that the resulting hardfacing composition possess good fracture toughness without
15 sacrificing hardness and wear resistance.

US-A-4836307 discloses a hardfacing composition employing particles of cemented or sintered tungsten carbide and relatively small particles of single crystal monotungsten carbide, sometimes referred to as "macrocrystalline"
20 tungsten carbide, in a mild steel matrix. This composition purports to possess the advantages of sintered tungsten carbide, as disclosed in US-A-3800891, with the advantages of single crystal monotungsten carbide, which is harder than the cemented or sintered tungsten carbide, yet is less
25 brittle than the alternative cast carbide.

US-A-5089182 discloses a method of manufacturing cast carbide pellets that are generally spherical in shape and have improved mechanical and metallurgical properties over prior-art carbide pellets. These cast pellets are not truly
30 spherical, but are sufficiently symmetrical that residual stresses in the pellets are minimized. Also, the generally spherical shape of these pellets eliminates corners, sharp edges, and angular projections, which are present in conventional crushed particles, that increase residual
35 stresses in the particles and tend to melt as the hardfacing composition is applied to the surface.

A need exists, therefore, for a hardfacing composition having a near-optimal balance between wear-resistance and toughness and that incorporates the properties of several types of carbide materials.

- 5 This application is divided from British Patent Application 9522528.0 (GB-A-2295157) which describes and claims similar subject-matter.

The present invention is set out in claim 1.

10 Examples of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of an earth-boring bit of the type contemplated by the present invention.

Figure 2 is a photomicrograph of a section of the applied hardfacing composition according to the present invention.

- 15 Figure 3 is a photograph of a worn tooth of an earth-boring bit as shown in Figure 1, illustrating the wear characteristics of the applied hardfacing composition according to the present invention.

20 Figure 4 is a photomicrograph of the surface of worn applied hardfacing composition according to the present invention.

In Figure 1, an earth-boring bit 11 includes a bit body, which is threaded at its upper extent 15 for connection onto a drillstring. Each leg of bit body 13 is provided with a lubricant compensator 17, a preferred embodiment of which is 25 disclosed in US-A-4727942. At least one nozzle 19 is provided in bit body 13 to discharge drilling fluid from the interior of the drillstring to cool and lubricate bit 11 and to carry away cuttings generated during drilling. Three cutters 21, 23 (one of which is obscured from view in the perspective of 30 Figure 1) are rotatably mounted on cantilevered bearing shafts depending from bit body 13. A plurality of cutting

elements 25 are formed on each cutter 21, 23. According to the preferred embodiment of the present invention, cutting elements 25 are milled or steel teeth formed from the material of cutters 21, 23.

5 Conventionally, wear-resistant hardfacing may be applied to increase their wear-resistance. Hardfacing may also be applied to the shirrtail (portion above the cutters 21, 23) of each bit leg forming the bit body 13. Hardfacing may also be applied to the outermost or gauge surfaces of cutters 21,
10 23. These are exemplary surfaces of bit 11 that are subjected to abrasive wear during drilling operation. Hardfacing generally may be applied to any surface of bit 11 that is subjected to abrasive wear.

An improved hardfacing composition that is particularly
15 suitable for application to earth-boring bits 11 is composed of a quantity of sintered carbide pellets in combination with a quantity of cast carbide pellets in a metal matrix. The term "pellet" is used to mean particles of carbide that are generally spherical in configuration. Pellets are not true
20 spheres, but lack the corners, sharp edges, and angular projections commonly found in crushed and other non-spherical carbide grains or particles. These surface irregularities cause the particles to possess residual stresses and may melt during application of the hardfacing composition, degrading
25 the properties of the hardfacing. Generally spherical pellets are believed to have reduced levels of residual stresses and generally do not possess irregularities that are believed to melt during application.

The sintered carbide pellets comprise crystals or particles
30 of tungsten carbide sintered together with a binder, usually cobalt, into the generally spherical pellet configuration. The cast carbide pellets are tungsten carbide grains or particles melted and cast, under controlled conditions, in a generally spherical configuration. The preferred method for
35 manufacturing cast tungsten carbide pellets is disclosed in US-A-5089182.

The enhanced fracture toughness of the sintered carbide pellets, together with the hardness and strength of the cast carbide pellets, results in a hardfacing composition having improved wear-resistance and fracture toughness over
5 hardfacing compositions employing crushed carbide particles, sintered pellets or particles, or macrocrystalline or single crystal monotungsten carbide, and combinations thereof.

Tungsten carbide is the preferred carbide for the hardfacing
10 composition according to the present invention. However, cast and sintered pellets of chromium, molybdenum, niobium, tantalum, titanium, and vanadium carbides would be suitable.

According to the preferred embodiment of the present invention, the improved hardfacing composition includes the
15 following materials, in pre-application ratios:
41-49% by weight sintered tungsten carbide pellets;
8-12.8% by weight cast tungsten carbide pellets;
8-12.8% by weight crushed sintered tungsten carbide particles and a balance of the composition being matrix metal.

20 According to the preferred embodiment of the present invention, the carbide pellets and particles are in the form of a granular filler in a tube of matrix metal. To achieve the above-referenced pre-application ratios, the granular filler comprises 67-71% by weight of the finished rod. The
25 granules then comprise the following pre-application ratios:
62.5-68.5% by weight sintered tungsten carbide pellets;
12-18% by weight spherical cast tungsten carbide;
and 12-18% by weight crushed sintered tungsten carbide.

Also present in the tube with the granules is about 2-4% by
30 weight silicomanganese, about 0.4-0.6% by weight niobium and about 0.36% by weight resinox as flux, alloying element, and deoxidizer and binder, respectively. The tube carrying the granules is circular in cross-section and is formed of low-carbon steel and has an outer diameter of 3.2mm, a wall
35 thickness of 0.033mm, and a length of about 70-76cm. This

tube thus comprises 29-33% by weight of the tube and granular filler. Preferably, the sintered carbide pellets range in size from ASTM 16 mesh to ASTM 30 mesh. The cast carbide pellets range in size from about ASTM 40 mesh to about ASTM 80 mesh. The crushed sintered carbide ranges in size from about ASTM 20 mesh to about ASTM 30 mesh.

Figure 2 is a photomicrograph of a polished and etched section of the hardfacing composition set forth above as applied to a tooth 35 of an earth-boring bit 11. As can be seen, the larger sintered tungsten carbide pellets (grey) comprise the bulk of the hardfacing composition. The interstices or gaps between the larger sintered carbide pellets are filled by the spherical cast carbide pellets (dark grey to black). The larger spherical tungsten carbide pellets, by virtue of their size and larger presence in the composition, expose the largest surface area to abrasive wear. The smaller spherical cast carbide pellets fill the gaps or interstices between the larger sintered pellets, preventing the erosion of matrix metal from between the spherical sintered carbide pellets, thus prolonging the retention of the sintered carbide pellets in the hardfacing. The irregularly shaped crushed sintered carbide particles fill gaps in the matrix metal not otherwise occupied by the spherical sintered carbide pellets and are thought to aid in the weldability of the composition.

Figure 3 is a photograph of a worn steel tooth of an earthboring bit having hardfacing according to the present invention applied thereto. Figure 4 is a photomicrograph of a surface of a worn steel tooth bit having the hardfacing composition according to the present invention applied thereto. As can be seen, and as was described with reference to Figure 2, the larger spherical sintered tungsten carbide pellets bear the bulk of the abrasive wear and can be seen to be worn. The smaller spherical cast carbide pellets, having greater hardness and abrasion resistance than the sintered carbide pellets, can be seen between the pellets and are far less worn and stand above the matrix metal. The combination

of the larger, tougher spherical sintered carbide pellets with the smaller, harder spherical cast carbide pellets yields a hardfacing composition having improved wear and strength characteristics over conventional hardfacings
 5 employing sintered tungsten carbide, crushed cast tungsten carbide, or macrocrystalline tungsten carbide, or combinations thereof.

Following are examples of hardfacing compositions prepared and applied according to the present invention.

10 EXAMPLE

The following quantities and sizes of granular carbide materials were provided:

Spherical sintered tungsten carbide pellets comprising tungsten carbide particles or grains sintered with a 6% by
 15 weight cobalt binder and provided by Kennametal, Inc. of Fallon, Nevada, in the following sizes and percentages by weight:

ASTM Mesh Size	Range	Mean
+16	0 - 5%	3%
-16/+20	40 - 50%	47%
-20/+30	40 - 50%	47%
-30	0 - 5%	3%

Crushed sintered tungsten carbide, also provided by Kennametal, Inc., in the following sizes and
 25 percentages by weight:

ASTM Mesh Size	Range	Mean
+20	0 - 5%	3%
-20/+30	90 - 100%	94%
-30	0 - 5%	3%

Spherical cast carbide pellets, manufactured by WOKA Schweissttechnik GmbH, of Willich, Germany, in the following sizes and percentages by weight:

ASTM Mesh Size	Range	Mean
+40	0 - 5%	3%
-40/+60	90 - 100%	94%
-60	0 - 5%	4%

The carbide granules were blended, by tumbling in a barrel mill, together with 4% by weight silicomanganese, 0.5% by weight niobium and 0.36% by weight resinox. After the initial blending, alcohol was added and the granules reblended to "wet" the granular filler, followed by a drying step.

Annealed, cold-finished, low-carbon steel strip was cleaned and fed into a conventional tube-forming machine. The granular filler mixture was fed into the machine to fill the tubes. The tubes then were cut to 71-76cm (28-30") lengths and the ends of the tube crimped sealed. The finished rod then was baked in an atmosphere of air at 148-178°C (300-350°F) for a minimum of one hour to ensure complete drying of the granular filler. The resulting rods comprises 68% by weight of the granular filler and 32% by weight of the tube matrix metal.

A portion of one of the rods, prepared as set forth above, was melted to form a sample of the applied hardfacing composition according to the present invention. The sample was weighed and placed in contact with a steel wheel 16.5cm in diameter and 1.2cm wide. A force resulting from a 10kg weight was applied to the sample and the wheel and sample were immersed in a slurry of 30 grit aluminum oxide suspended in deionized water. The wheel was rotated at 100rpm for 500 revolutions. The test apparatus was similar to that prescribed by the ASTM B611 testing procedure. Generally, the aluminum oxide slurry is rubbed between the wheel and

sample, resulting in erosion of the sample. After the test, the sample is weighed to obtain an indication of the quantity of sample material eroded during the test. The amount of material eroded during the test is a relative indication of the wear resistance of the sample material. This test was repeated four times.

The laboratory test results for the samples of the hardfacing composition according to the present invention showed an average of 12% less material eroded and thus a 12% improvement in wear resistance over hardfacing compositions previously tested that did not include the spherical cast carbide pellets in combination with the spherical sintered carbide pellets.

A rod of hardfacing composition prepared as set forth above was applied by welding to selected teeth of a Hughes Christensen 25cm ATJ-1S bit similar to that depicted in Figure 1. Other teeth on the same bit were hardfaced with a hardfacing composition comprising only sintered spherical tungsten carbide pellets in a matrix metal. The hardfacing composition was applied by welding with an oxyacetylene torch, wherein the rod matrix metal was melted, along with a portion of the underlying tooth steel, and the resulting applied hardfacing was air cooled. Oxyacetylene welding is preferred to atomic hydrogen welding because the increased temperatures of the atomic hydrogen welding process, unless carefully controlled, melt the matrix metal and tooth steel too quickly, permitting the dense, spherical sintered and cast pellets to "sink" into the tooth steel and away from the surface of the hardfacing. This bit was run in a well in Grimes County, Texas. After 40 hours, the bit drilled 1034 m. The bit performance was rated good and comparison revealed that the bit outperformed, in terms of cost-per-metre, the average of the best bits run in offset wells over similar intervals and pulled with a similar dull condition.

The teeth with the hardfacing composition according to the present invention were less worn than the other teeth.

The teeth of another Hughes Christensen 25cm ATJ-1S bit were hardfaced with the composition as set forth above. The bit was run in another well in Grimes County, Texas. After 48.6 hours, the bit drilled 998m. The bit performance was rated
5 good and the dull condition was much better than that of the best bits run in offset wells over similar intervals, although it did not top their performance in terms of cost-per-metre. The teeth with the hardfacing composition according to the present invention were less worn than the
10 other teeth.

The teeth of a Hughes Christensen 20cm ATJ-1 bit were hardfaced with the composition as set forth above. The bit was run in a well in Carbon County, Wyoming. After 55.5 hours, the bit drilled 1083m and was pulled with a better
15 dull condition than the bits run in offset wells over similar intervals. The teeth with the hardfacing composition according to the present invention were less worn than the other teeth.

The teeth of another Hughes Christensen 20cm ATJ-1 were
20 hardfaced with the composition as set forth above. The bit was run in another well in Carbon County, Wyoming. After 42.5 hours, the bit drilled 867m and was pulled with a better dull condition than the bits run in offset wells over similar intervals. The teeth with the hardfacing composition
25 according to the present invention were less worn than the other teeth.

The laboratory wear resistance testing, combined with the experimental results obtained from bits in the field, indicate that the hardfacing composition according to the
30 present invention is a marked improvement over conventional hardfacing compositions. This improvement is believed to be the result of the combination of the spherical sintered and cast tungsten carbide pellets, which yield a hardfacing composition having a good balance between hardness and
35 fracture toughness.

CLAIMS

1. An earth-boring bit hardfacing composition comprising in pre-application ratios:
41-49% by weight spherical sintered carbide pellets;
5 8-12.8% by weight spherical cast carbide pellets;
8-12.8% by weight crushed sintered carbide particles; and a balance of the composition matrix metal.
2. A composition as claimed in claim 1 wherein the carbide is tungsten carbide and the matrix metal is in the form of a
10 tube containing the cast and sintered carbide particles and pellets.
3. A composition as claimed in claim 1 wherein the particulate carbide materials are selected from one of the group of carbides consisting of chromium, molybdenum,
15 niobium, tantalum, titanium, tungsten, and vanadium carbides and alloys and mixtures thereof.
4. A composition as claimed in any one of claims 1 to 3 wherein the spherical sintered carbide pellets range in size between 16 mesh and 30 mesh.
- 20 5. A composition as claimed in any one of claims 1 to 4 wherein the crushed sintered carbide particles range in size between 20 mesh and 30 mesh.
6. A composition as claimed in any one of claims 1 to 5 wherein the spherical cast carbide pellets range in size
25 between 40 mesh and 80 mesh.
7. A composition as claimed in any one of claims 1 to 6 wherein the matrix metal is low-carbon steel alloyed with niobium.

Amendments to the claims have been filed as follows

1. An earth-boring bit hardfacing composition comprising in pre-application ratios:
41-49% by weight spherical sintered carbide pellets;
5 8-12.8% by weight spherical cast carbide pellets;
8-12.8% by weight crushed sintered carbide particles; and a balance of the composition matrix metal.
2. A composition as claimed in claim 1 wherein the carbide is tungsten carbide and the matrix metal is in the form of a
10 tube containing the cast and sintered carbide particles and pellets.
3. A composition as claimed in claim 1 wherein the particulate carbide materials are selected from one of the group of carbides consisting of chromium, molybdenum,
15 niobium, tantalum, titanium, tungsten, and vanadium carbides and alloys and mixtures thereof.
4. A composition as claimed in any one of claims 1 to 3 wherein the spherical sintered carbide pellets range in size between ASTM 16 mesh and ASTM 30 mesh.
- 20 5. A composition as claimed in any one of claims 1 to 4 wherein the crushed sintered carbide particles range in size between ASTM 20 mesh and ASTM 30 mesh.
6. A composition as claimed in any one of claims 1 to 5 wherein the spherical cast carbide pellets range in size
25 between ASTM 40 mesh and ASTM 80 mesh.
7. A composition as claimed in any one of claims 1 to 6 wherein the matrix metal is low-carbon steel alloyed with niobium.



Application No: GB 9802307.0
Claims searched: 1-7

Examiner: R.B. Luck
Date of search: 26 February 1998

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.P): C7A Df O and S C7D DB400

Int Cl (Ed.6): C22C 29/02,29/06,29/08,29/10

Other:

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
	No relevant documents found	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

This Page Blank (uspto)